

Project: _____

Date: _____

Backer Board: 7/16 OSB fiberboard provides dimensional stability, eliminates warping found with plywood.


Foam Core: 100 ILD foam filler, glued to backer board, with vonar interliner

Vinyl Cover: 14 oz. reinforced polyester laminated fire retardant, rot and tear resistant, antifungal. finish: crush embossing(leatherette) or matte

Tear strength: 75 x 75

tensile strength: 220 x 220 lbs./in.

1" nailer bottom z-clip top

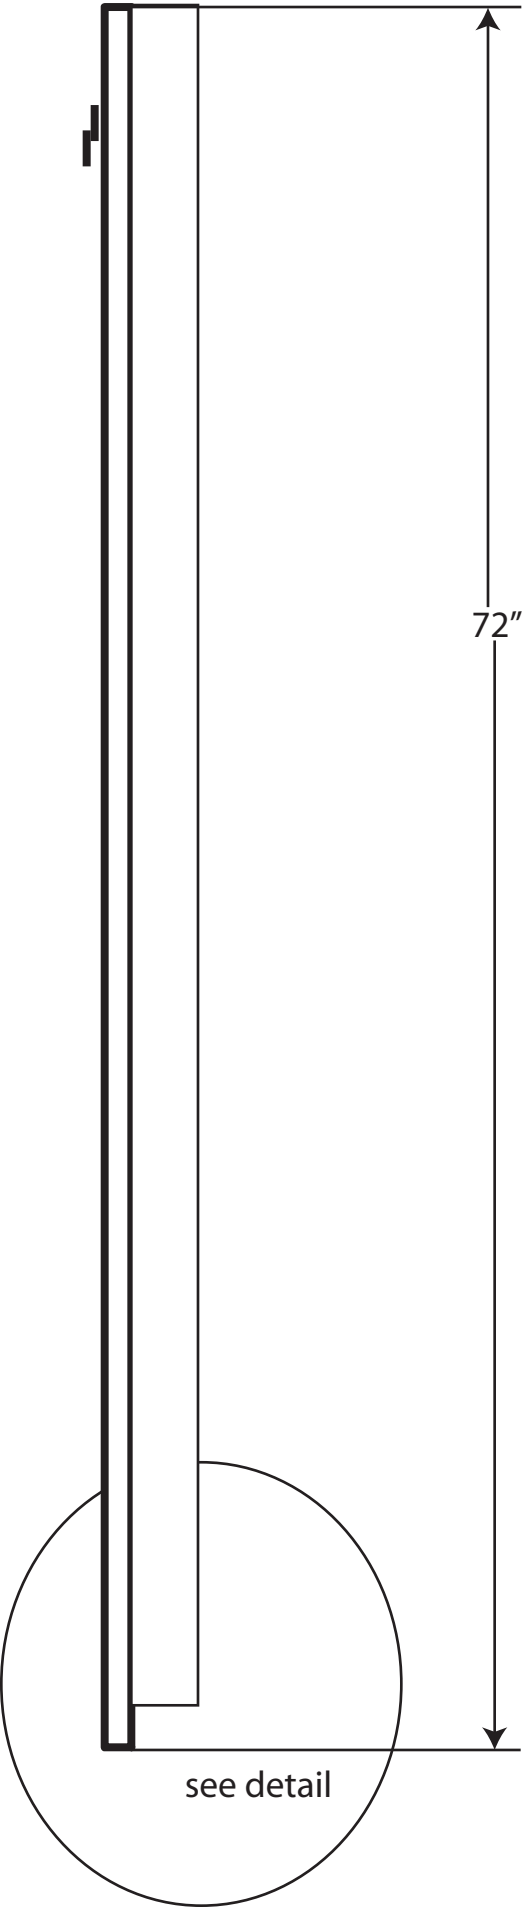

NCI

VINYL AND CANVAS

