


WALL PADDING SUBMITTAL SHEET

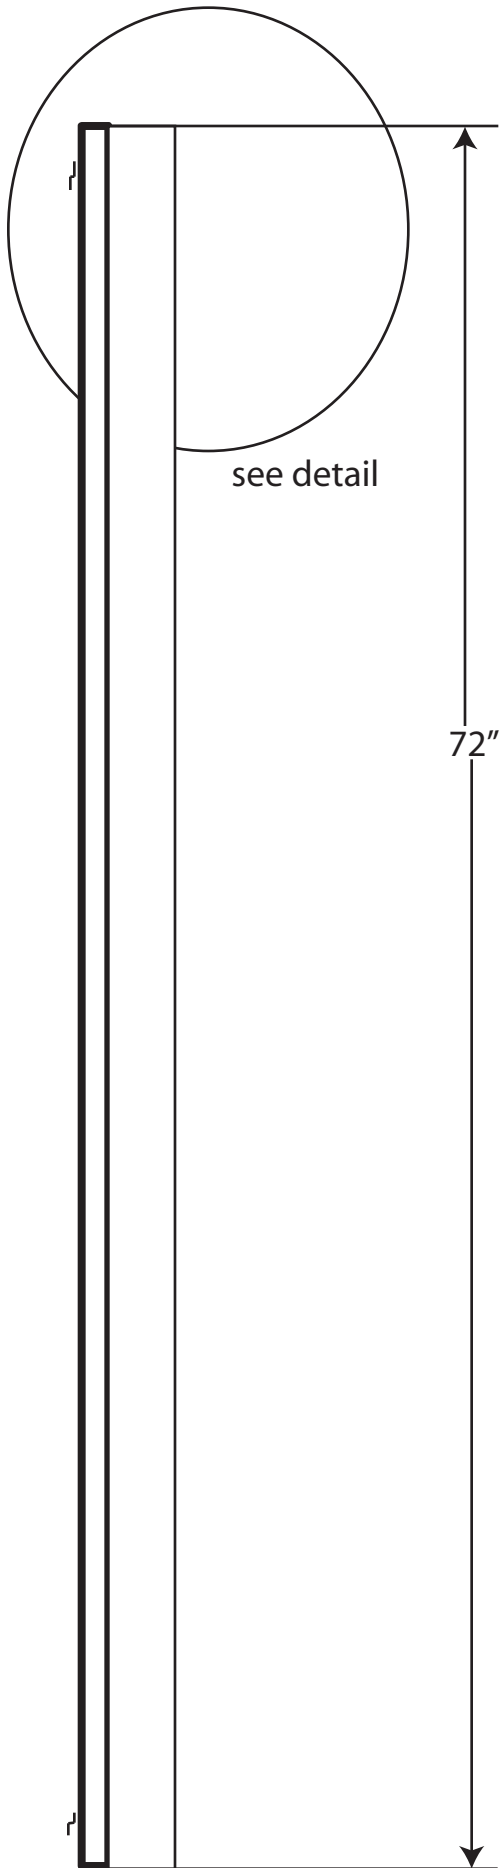

Project: _____

Date: _____

Backer Board: 7/16 OSB backerboard provides dimensional stability, eliminates warping found with plywood.

Foam Core: 100 ILD foam filler bonded to backer board, with vonar liner.

Vinyl Cover: 14 oz. reinforced polyester laminated fire retardant, rot and tear resistant, antifungal.

finish: crush embossing(leatherette) or matte

Tear strength: 75 x 75

tensile strength: 220 x 220 lbs./in.

Installation: Two rows z clip

NCI

VINYL AND CANVAS

